


STATUS: Standard  
CLASSIFICATION OF EQUIPMENT: Unclassified  
USING SERVICE: Navy  
DATE OF THIS SHEET: 8 May 52

**AN/FGC-9**

TELETYPEWRITER SET

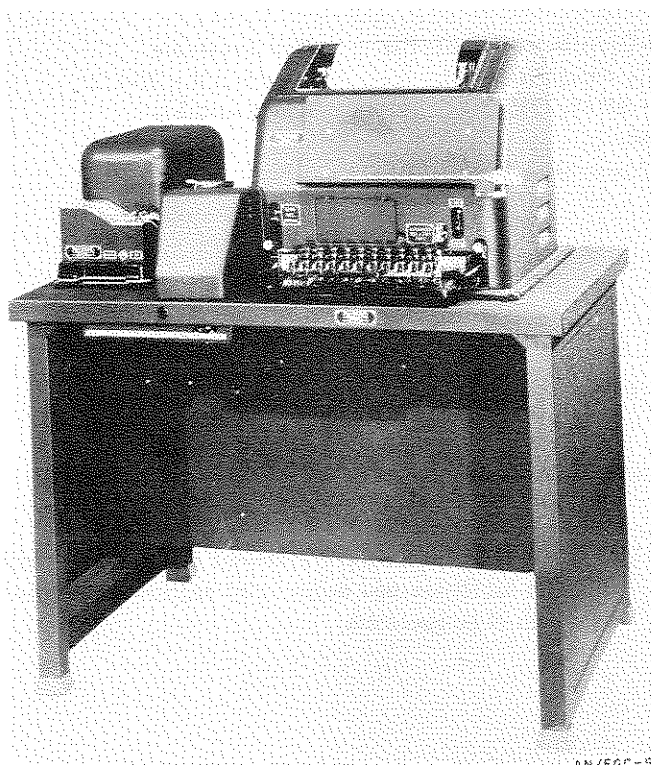

Teletypewriter Set AN/FGC-9 is used for ship-to-ship and ship-to-shore radioteletype communication. Provides either direct keyboard or tape transmission.

This is a commercial (Teletype Corp Model 19) page printer set adapted for shipboard use.

Resilient shock mounts are provided between the mounting table and the printer and on the transmitter-distributor to reduce vibration. The table is bolted to the deck.

<b>AN/FGC-9</b>	INSTRUCTION LITERATURE: NavShips 91239
	CLASSIFICATION OF EQUIPMENT: Unclassified
TELETYPEWRITER SET	USING SERVICE : Navy
	DATE OF THIS SHEET : 8 May 52

**MAJOR COMPONENTS**

QUANT	NAME OF COMPONENT	DIMENSIONS (IN) INSTALLED	WEIGHT (LBS)
1	Transmitter-Distributor TT-57/FG	Not Available	Not Available
1	Power Supply PP-315/GGA-1	15 x 9-3/4 x 25-1/2	" "
1	Typing Unit BP119/210	Not Available	" "
1	Motor Unit MU-4	" "	" "
1	Perforator Transmitter PEX25JX	" "	" "

**OPERATIONAL CHARACTERISTICS**

**TACTICAL USE:** Teletypewriter communication stations.

**INSTALLATION:** Shipborne, ground.

**CAN COMMUNICATE WITH:** Related (or equivalent) terminal and control equipment over wire or radio facilities and associated apparatus composing the system in which it is operated.

**TECHNICAL CHARACTERISTICS**

**OPERATING FUNCTIONS:** Page printing of incoming messages, keyboard or perforated tape transmission of outgoing messages.

**OPERATING SPEED:** 368 opm, approximately 60 wpm.

**MOTOR CHARACTERISTICS:** Synchronous, capacitor start, motor.

**POWER REQUIREMENTS:** 110 - 115v, 60 cyc (+0.5)1 phase, ac.

**PHYSICAL CHARACTERISTICS**

Teletypewriter Set AN/FGC-9 measures 41-5/8 x 36 x 23-1/2 inches.